


Unitronix Family of Motors

Base Model #	Watts Output	HP	Volts/Hz.	Peak Efficiency	Typical Fan Load @ 1500 RPM	RPM
B-Frame						
UTBCJ	6-12	1/125-1/111	115/50/60	65%	7" - 8 3/4"	1000-3000
UTBCN	6-12	1/125-1/111	230/50/60	65%	7" - 8 3/4"	1000-3000
UTB1CB	6-12	1/125-1/111	115/50/60	65%	7" - 8 3/4"	1550
UTBCF	16	1/47	115/50/60	60%	8 3/4" - 10"	1000-3000
UTBCM	16	1/47	230/50/60	60%	8 3/4" - 10"	1000-3000
UTBCC	16	1/47	115/50/60	60%	8 3/4" - 10"	1550
UTBEE	25	1/30	115/50/60	70%	10" - 11"	1000-3000
UTBEL	25	1/30	230/50/60	70%	10" - 11"	1000-3000
UTBEC	35	1/20	115/50/60	60%	10" - 12"	1000-3000
UTBEJ	35	1/20	230/50/60	60%	10" - 12"	1000-3000
A-Frame						
UTAEJ	25	1/30	115/50/60	70%	10" - 11"	1000-3000
UTAEI	25	1/30	230/50/60	70%	10" - 11"	1000-3000
UTAEK	35	1/20	115/50/60	60%	10" - 12"	1000-3000
UTAEJ	35	1/20	230/50/60	60%	10" - 12"	1000-3000
UTAGB	50/75	1/15-1/10	115/50/60	65%	11" - 14"	1000-3000
UTAGH	50/75	1/15-1/10	230/50/60	65%	11" - 14"	1000-3000
UTAGF	50/75	1/15-1/10	115/50/60	65%	11" - 14"	1550
UTAGF	50/75	1/15-1/10	230/50/60	65%	11" - 14"	1550

Cast iron bearing and housing for long life and reliability.

High capacity oil reservoir continuously supplies cooled, filtered oil thru the bearing.

Spiral grooved shaft is the heart of the positive pumping system, assuring thick film lubrication for extended bearing life.

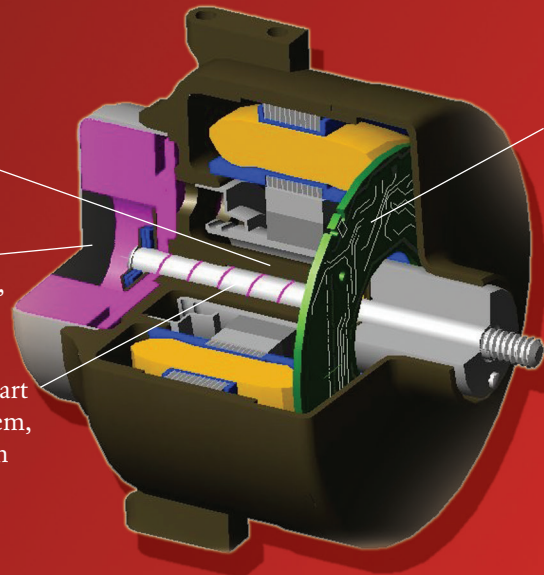

Electronic control board programmable to customer selected speeds.



Electric Motors & Specialties, Inc.
 701 W. King St. • P.O. Box 180 • Garrett, IN 46738
 Phone: (260) 357-4141 Fax: (260) 357-3888
 info@emsmotors.com • www.emsmotors.com